


PREPARING AND TRANSMITTING MSGS USING FLDigi

Custom ICS 213 Oswego

1. If you already have FLDigi open, click on FLMsg to bring up that window and then go to step 3
2. If you have not already opened FLDigi, do so, resulting in FLDigi, FLWrap, FLAmP and FLMsg windows showing. Minimize (- in upper right hand corner) FLWrap and FLAmP
3. In the FLMsg window Click on the “FORM” button at the top.
4. Select “CUSTOM” and then ICS-213-OSWEGO in the choice box.

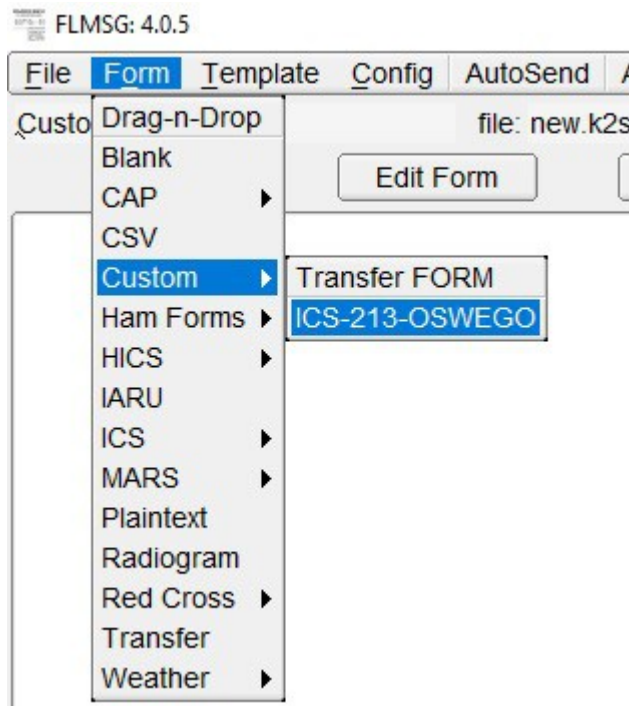

5. FLMsg changes to asking if you want to edit or view. Select “EDIT”

FLMSG: 4.0.5

File Form Template Config AutoSend ARQ Help

Custom Editable Html file: new.k2s

Edit Form View Form

```

CUSTOM_FORM, ICS-213-Oswego.html
n,
t,
f,
su,
dl,
tl,
sl,
s2,
d2,
t2,
s3,
m,
r,
i.1,CHECKED
i.2,

```

☐ Comp MT63-2KL

6. A new browser window opens, fill in the 213 form completely.

ICS-213-OSWEGO

127.0.0.1:8080

OSWEGO COUNTY EMERGENCY MANAGEMENT

STANDARD MESSAGE Agency Message #

To: (Agency/Location)
RACES Members

From: (Agency/Location)
WA2LBE

Subject: METAR Data

Date: (mm/dd/yy) 02/10/20

Time: (24hr clock) 1608

Select One
☒ Information Only
☐ Reply Required

Message: (PRINT)

SNE2057B43 SLP250 P0000 T10221083
 Temperature: -2.2°C (28°F)
 Dewpoint: -8.3°C (17°F) [RH = 63%]
 Pressure (altimeter): 30.25 inches Hg (1024.5 mb) [Sea level pressure: 1025.0 mb]
 Winds: from the N (350 degrees) at 12 MPH (10 knots; 5.1 m/s) gusting to 24 MPH (21 knots; 10.8 m/s)
 Visibility: 3 sm (5 km)
 Ceiling: 3300 feet AGL
 Clouds: overcast cloud deck at 3300 feet AGL
 Weather: -SN (light snow)
 QC Flag: automated observation with no human augmentation

Signature: WA2LBE Authority: ARO

Reply: (PRINT)

Date: (mm/dd/yy) Time: (24hr clock) Signature/Authority:

3/5/09 ICS-213-OSWEGO


White - Originator Copy; Canary - Recipient Copy; Pink - Command Copy

Submit Form

7. Click on "SUBMIT" at the bottom left.

8. A window showing that you completed the message may show up, depending on the version of FLMsg you have. Close it (X in the upper right corner).

9. The FLMsg window will now show the information you filled in the ICS-213-OSWEGO form.

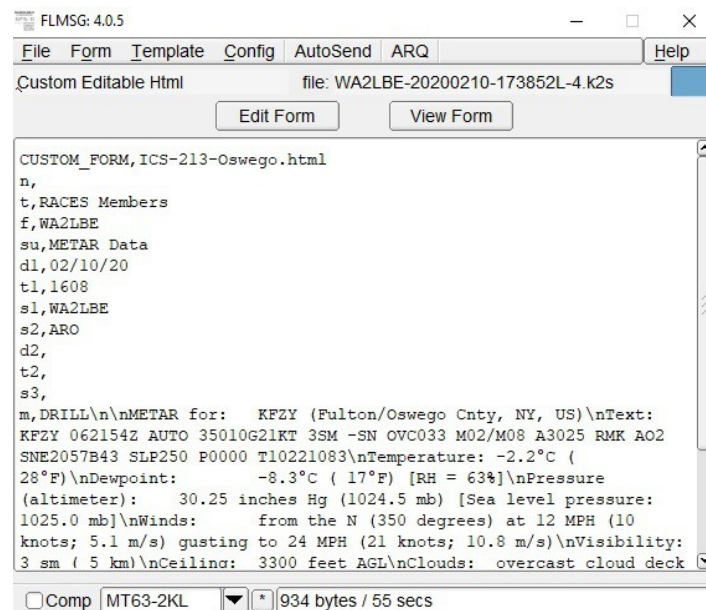

10. The FLMsg has a button for "AutoSend" at the top. Select it.
11. Another window appears asking "Save data file?", or "Form Modified, Save?", select "yes". At this point you can save the message under the internal generated file name or you can change it to one that fits your situation.
12. The message is automatically sent when you "save" the message.

To prepare a message for future transmittal, bring up the FLMsg window, open the form you want to use and edit. When finished go to "file" "save" and give it a name.

To send a saved prepared message. From the FLMsg window select FILE (upper left) and when the file window comes up go to the bottom where it says "file type" and be sure it says "all files". Select the message you want and use "AutoSend" when the message is displayed.

Message forms each have their own library, eg. plain text "p2s", custom 213 "k2s, ARRL "m2s", etc. are all separate libraries which you can access by selecting the particular form and then file - open for the list.